

1 & 4 *HPXdrive* EXCAVATOR

KINSHOFER
crane and excavator attachments

HPXdrive
EXCAVATOR



1 & 4 *HPXdrive*

The hydraulic drive unit **HPXdrive**, characterized by its constant closing force, is optimally suited for daily operations in general construction, civil engineering and landscaping.

In contrast to conventional hydraulic grabs, with the **HPXdrive** the torque is generated by two hollow shafts, which run opposed and have a helix thread, hydraulically driven by a single piston. The force is delivered to two shafts, on which the shells are mounted. These advantages of the **HPXdrive** - technology provide an extended service life and higher efficiency.

The compact design of the **HPXdrive** without open greasing points allows for operations in water protection areas, as no lubricant can be washed out.



PRESSURE RELIEF VALVES NON-RETURN VALVE

Two pressure relief valves protect the grab against excessive operating pressure. Therefore, the installation of extra valves on the carrier machine is no longer necessary, and saves time and money. The integrated non-return valve prevents the unintended retention of loads, even at pressure drops.

LONG SERVICE LIFE

The outer surface of shafts and piston are hardened through a nitrate-coating, ensuring durability and minimum wear and tear.





CONSTANT CLOSING FORCE

Full closing force is delivered from the beginning of the digging process, when the shells are in the opened position, ensuring powerful penetration even in grown soil. Full closing force is also provided at the end when the shells are closed, to optimally compact the material.

Please note: Closing forces refer to an internal working pressure of 26 MPa (260 bar). The recommended oil flow of 50 l/min provides an opening and closing time of 1,9 sec.

SHELL SYNCHRONISATION

As a result of having only one piston the shafts run synchronically and uniform. Compensation rods are unnecessary.

ROTATOR AND **HPXdrive**


The hydraulic rotator with continuous rotation and the **HPXdrive** are integrated in a single unit. Connecting hoses are not necessary, therefore no danger of leaks or breakage.

OPTIMAL WEIGHT

Optimally sized parts reduce overall weight.

MAINTENANCE FREE

The drive unit runs in a permanent oil bath – no lubrication necessary. This saves time and extends the service life.

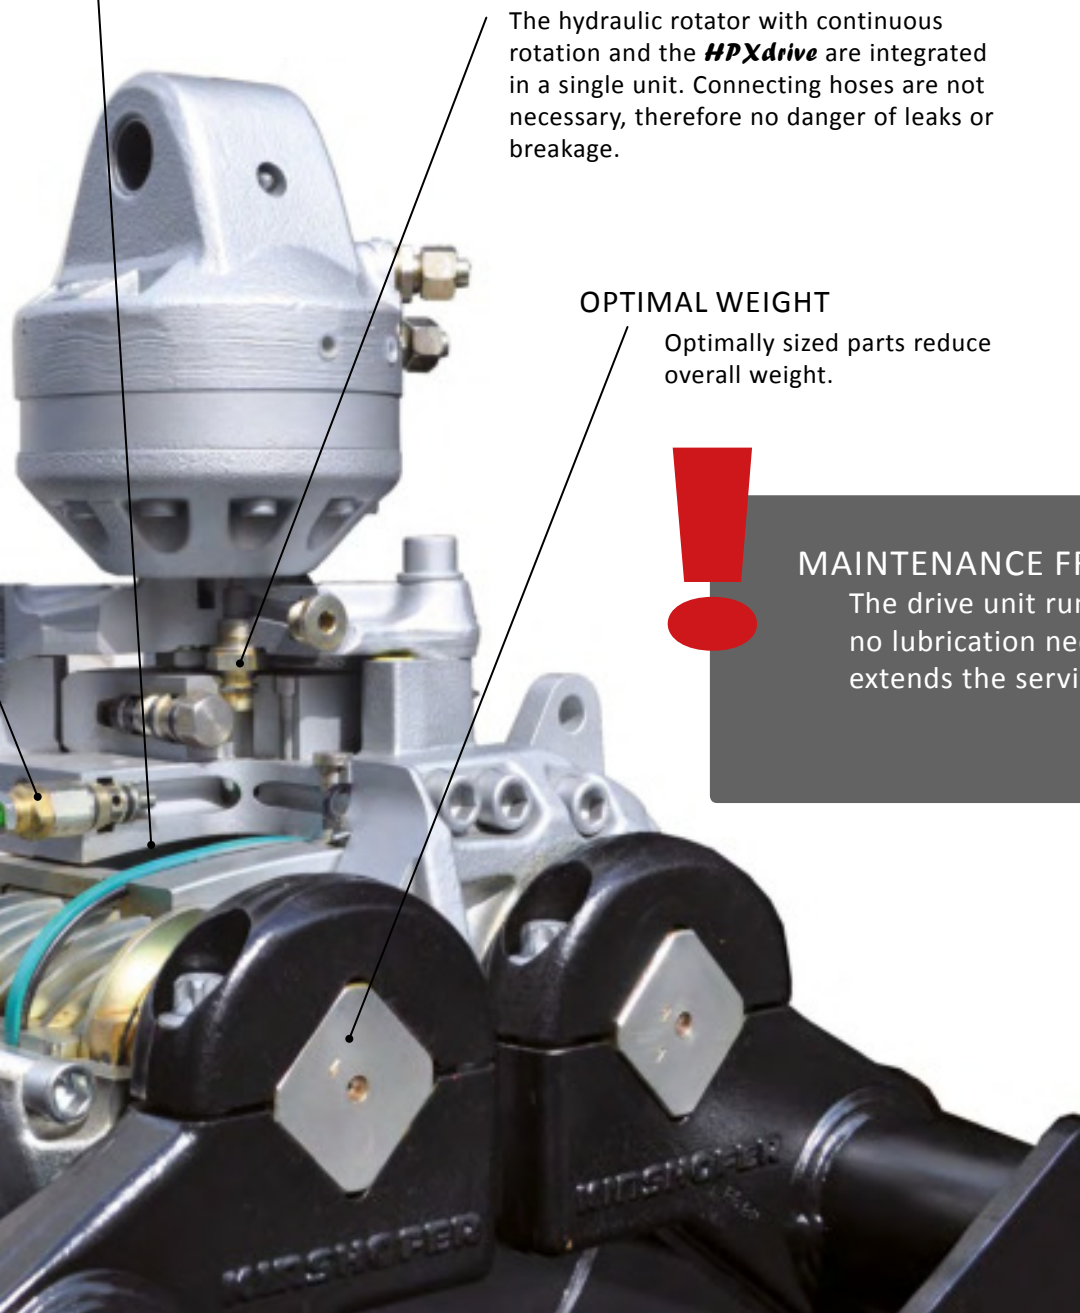





SHELL EXCHANGE SYSTEM

The bucket shells are bolted to the shafts and therefore easy to replace by another set. Different types of shells for diverse applications can be refitted onto the driving unit, e.g. clamshell bucket, demolition & sorting grab, multi purpose grab and rock grab.

Comparison of Closing Forces in kN

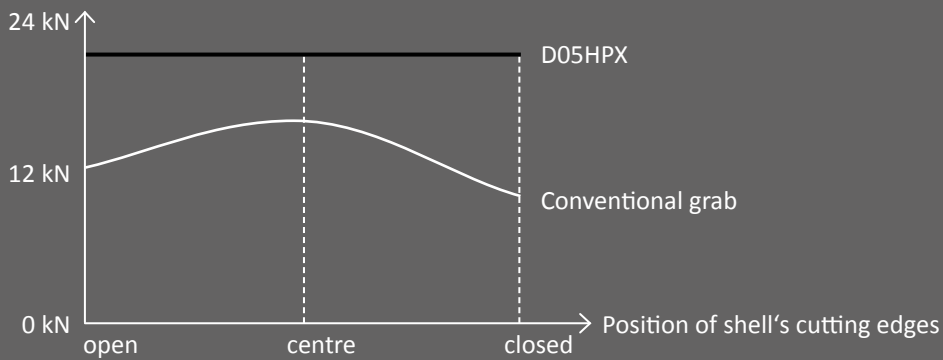


Compact Design

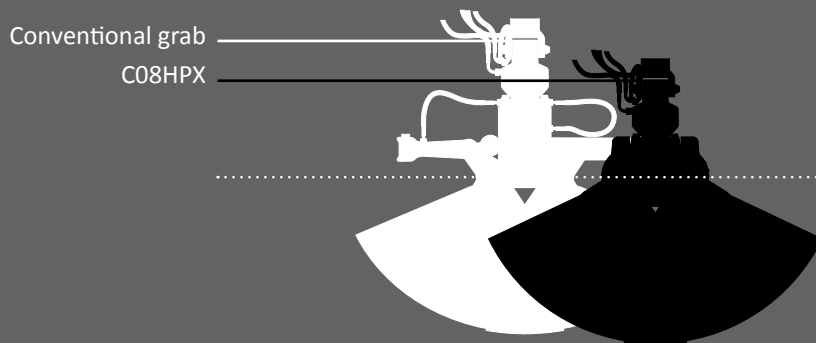

Due to its compact design with the low overall height, the **HPXdrive** is resistant against dirt, blows and uprising material. There are no protruding parts and the shells are easily accessible from the top. No hoses are required in combination with a **KINSHOFER**-rotator with flange. Hydraulic hoses are not necessary due to the direct connection between rotator and drive unit (internal oil passage).

No leaks. No hose damages.

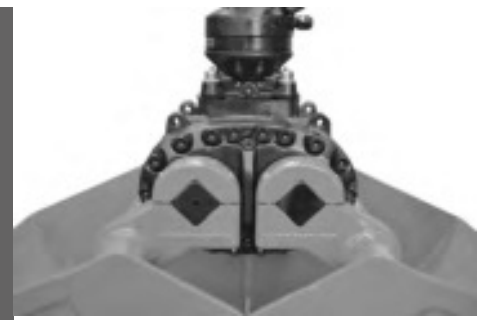

Shells mounted



Loosen 4 bolts on each side



Remove connecting pieces one after another



HPXdrive loosened



Lift **HPXdrive** for exchange of shells



Hauptsitz Deutschland:

KINSHOFER GmbH
 Hauptstrasse 76
 83666 Waakirchen
 Tel.: +49 (0)8021 – 88 99 0
 Fax: +49 (0)8021 – 88 99 37
 Email: info@kinshofer.com

United Kingdom:

KINSHOFER UK Ltd.
 4 Milton Industrial Court
 Horsfield Way, Bredbury
 Stockport, Cheshire, SK6 2TA
 Tel.: +44 (0)161 – 406 7046
 Fax: +44 (0)161 – 406 7014
 Email: sales@kinshofer.co.uk

France:

KINSHOFER France S.A.R.L.
 B.P. 20100
 F-67213 Obernai Cedex
 Tel.: +33(0) 3 88 39 55 00
 Fax: +33(0) 3 88 79 06 75
 Email: info@kinshofer.fr

Canada:

KINSHOFER North America
 5040 Mainway Drive, Unit #11
 Burlington, ON L7L 7G5
 Tel.: +1 (905) 335 2856
 Fax: +1 (905) 335 4529
 Toll Free (North America):
 1 (800) 268 9525
 Email: sales-northamerica@kinshofer.com

United States of America:

KINSHOFER USA
 6420 Inducon Drive
 Suite G
 Sanborn, NY, 14132
 Tel.: +1 (716) 731 4333
 Toll Free (North America):
 1 (800) 268 9525
 www.kinshofer.com

中国:

Darda **KINSHOFER** Construction
 Machinery Co. Ltd.
 Unit #306, Landmark Tower 2
 8 Dongsanhuan Road
 Beijing 100004
 Tel.: +86 (10) 6590 6422
 Fax: +86 (10) 6590 6423
 Email: info@darda.com.cn
 Website: www.darda.com.cn

Suomi:

KINSHOFER APO^{NOX} Oy
 Laajamäentie 1
 FI-13430 Hämeenlinna
 Tel.: +358 (0)75 7540 200
 Fax: +358 (0)75 7540 210
 Email: info@kinshofer-aponox.com
 Website: www.kinshofer-aponox.com

Sverige:

RF-System AB
 Furutorpsgatan 6
 SE-288 34 Vinslöv
 Tel.: +46 (0)44 817 07
 Fax: +46 (0)44 859 63
 Email: info@rf-system.se
 Website: www.rf-system.se



DVS
 Z E R T

KINSHOFER

is an ISO 9001 certified Company.
 DVS ZERT is a registered trademark
 of DVS ZERT e.V., Düsseldorf.

KINSHOFER
 crane and excavator attachments