


The bucket shells of the **HPXdrive** are bolted to the shafts, and therefore it is very easy to replace them with another set of shells. Different types of shells for different applications can be refitted onto the driving unit, e.g. clamshell bucket, rock grab, timber grab, hay and forestry grab and multi purpose clamshell. Other types of shells are available on request.

The interchangeable shells are delivered with an exchange aid that guarantees that the **HPXdrive** can be positioned with ease.

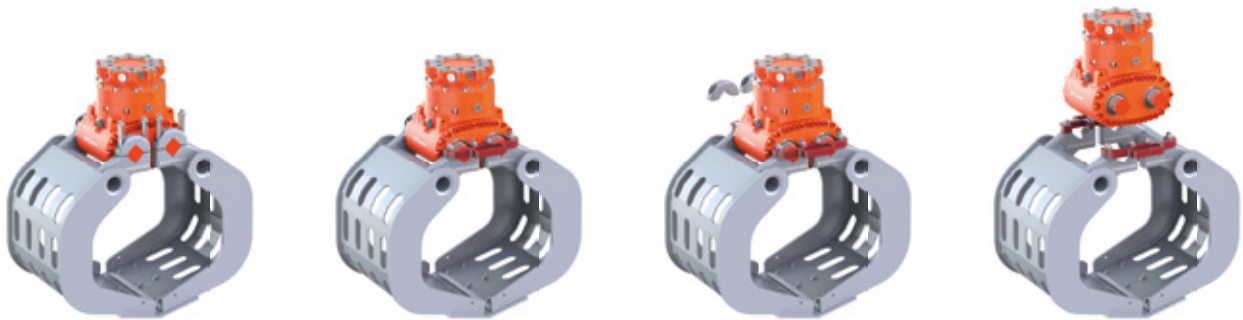

Type	Operating weight (t/lbs)	Width (mm/in)	Volume (liter/c.y.)	Number of teeth	Weight (kg/lbs)	Load capacity (kg/lbs)
------	--------------------------	---------------	---------------------	-----------------	-----------------	------------------------

### Exchangeable Shells for Clamshell Buckets

<b>C05HPX-40S</b>	3-5 / 6600-11000	400 / 15.7	115 / 0.15	4	100 / 220	3000 / 6600
<b>C05HPX-45S</b>	3-5 / 6600-11000	450 / 17.7	130 / 0.17	4	125 / 275	3000 / 6600
<b>C05HPX-50S</b>	3-5 / 6600-11000	500 / 19.6	140 / 0.18	4	130 / 286	3000 / 6600
<b>C05HPX-60S</b>	3-5 / 6600-11000	600 / 23.6	170 / 0.22	6	145 / 319	3000 / 6600
<b>C05HPX-80S</b>	3-5 / 6600-11000	800 / 31.4	230 / 0.30	6	180 / 396	3000 / 6600
<b>C08HPX-40S</b>	5-8 / 11000-17600	400 / 15.7	145 / 0.19	4	110 / 242	3000 / 6600
<b>C08HPX-45S</b>	5-8 / 11000-17600	450 / 17.7	160 / 0.21	4	135 / 297	3000 / 6600
<b>C08HPX-50S</b>	5-8 / 11000-17600	500 / 19.6	180 / 0.24	4	145 / 319	3000 / 6600
<b>C08HPX-60S</b>	5-8 / 11000-17600	600 / 23.6	220 / 0.29	6	150 / 330	3000 / 6600
<b>C08HPX-80S</b>	5-8 / 11000-17600	800 / 31.4	300 / 0.39	6	195 / 429	3000 / 6600



### Exchangeable Shells for Demolition and Sorting Grabs

<b>D04HPX-40S</b>	2-4 / 4400-8800	420 / 16.5	60 / 0.08	-	94 / 206	1500* & 1000** 3300* & 2200**
<b>D06HPX-45S</b>	3-6 / 6600-13200	470 / 18.5	150 / 0.20	-	126 / 277	2000* & 1000** 4400* & 2200**
<b>D09HPX-50S</b>	6-9 / 13200-19800	500 / 19.6	220 / 0.29	-	183 / 402	2500* & 1000** 5500* & 2200**

\*Load capacity at form locking / \*\*Load capacity at friction locking



### Exchangeable Shells for Multi Purpose Grabs

<b>A04HPX-40S</b>	2-4 / 4400-8800	386 / 15.1	70 / 0.09	3	100 / 220	1500* & 1000** 3300* & 2200**
<b>A06HPX-45S</b>	3-6 / 6600-13200	450 / 17.7	145 / 0.19	5	125 / 275	2000* & 1000** 4400* & 2200**
<b>A09HPX-50S</b>	6-9 / 13200-19800	500 / 19.6	210 / 0.27	5	186 / 409	2500* & 1000** 5500* & 2200**

\*Load capacity at form locking / \*\*Load capacity at friction locking



### Exchangeable Shells for 3-Finger Timber Grabs

<b>T06HPX-3ZS</b>	3-5 / 6600-11000	375 / 14.7	-	-	95 / 209	1000 / 2200
<b>T09HPX-3ZS</b>	5-9 / 11000-19800	375 / 14.7	-	-	95 / 209	2000 / 4400



### Exchangeable Shells for Rock Grabs

<b>R05HPX-0,16S</b>	3-5 / 6600-11000	400 / 15.7	0,16 m <sup>2</sup> / 0,11 cords	-	70 / 154	1000 / 2200
<b>R08HPX-0,16S</b>	5-8 / 11000-17600	400 / 15.7	0,16 m <sup>2</sup> / 0,11 cords	-	70 / 154	1000 / 2200



**Package consists of:** exchangeable shells, bolt-on teeth (for clamshell buckets), shell exchange support kit

**Note:** The KINSHOFER **HPXdrive** shells can only be used in combination with KINSHOFER rotator and drive unit **HPXdrive**